

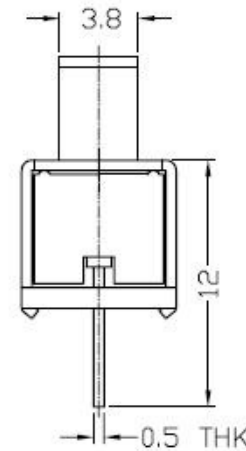
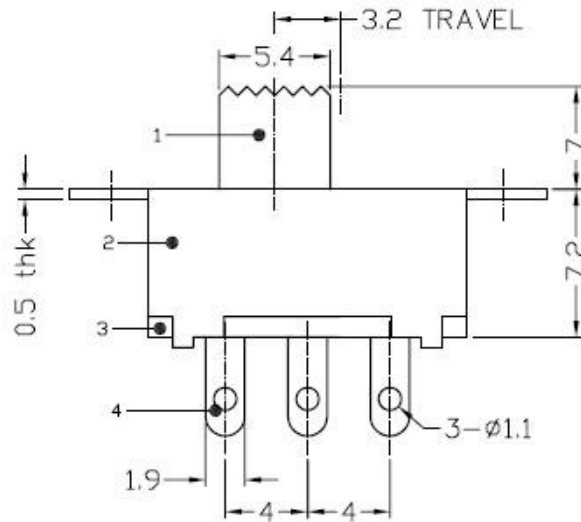


SPECIFICATIONS:


CONTACT: 1P2T- SILVER PLATED
 RATING: 0.3A X 30 V DC
 CONTACT RESISTANCE: 30 milli Ohms max.
 INSULATION RESISTANCE: 100 M Ohms min. 500 V DC
 PROOF VOLTAGE: 500 V AC for 1 min.
 OPERATING FORCE: 150 + 100 gf
 OPERATING LIFE: 50,000 cycles



Part code: 71-1P2T-G7

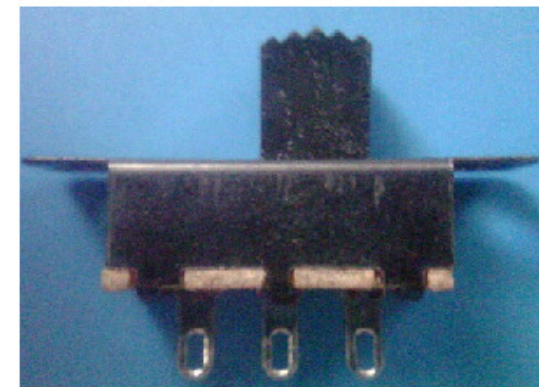


SCHEMATIC (NON-SHORTING)



P. C. B LAYOUT

**RoHS
Compliant**

		Revision No: 00	Sheet 1 of 1
		Design by: PRM	Date: 02/01/12
		Checked by: APM	Date: 02/01/12
		Approved by: APM	Date: 05/01/12
Main Product: Tact Switch		Drawing No: 71-1P2T	
Tolerance: ± 0.2 mm	Scale: Not to scale		
Dimensions: mm	3rd Angle Projection		
			Pran Electronics Pvt. Ltd. 52 G.I.D.C. Makarpura Vadodara 390 010.






PRAN ELECTRONICS PVT. LTD.

52, GIDC, Makarpura, Vadodara - 390 010. India.
Phone : +91 - 265 - 263 2916, 263 5920 Fax : + 91 - 265 - 263 5918
E-mail : info@pranelectronics.com Web : www.pranelectronics.com


AN ISO 9001:2000 COMPANY

Slide Switch 1P3T
Part code: 71-1P3T-G8

Rev. 00 date 10/6/2013

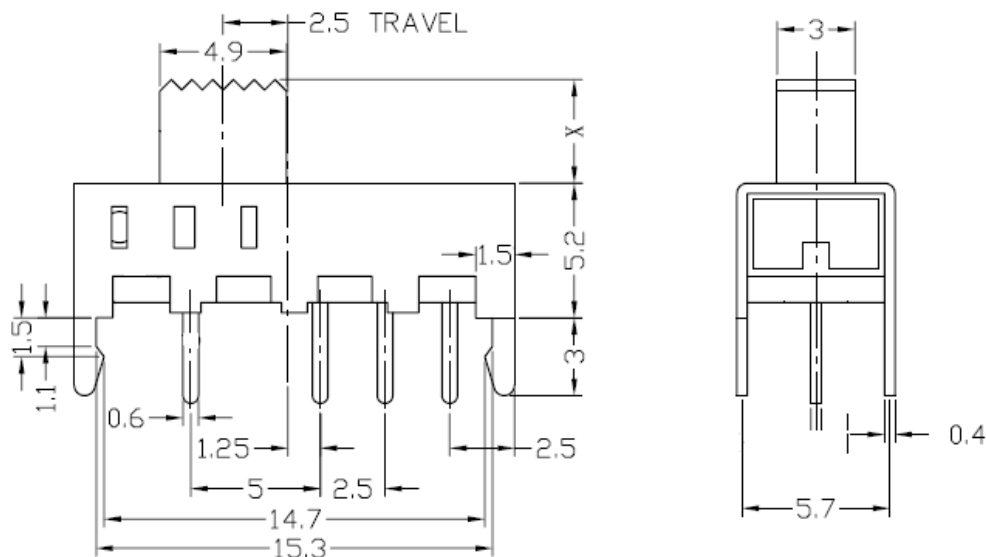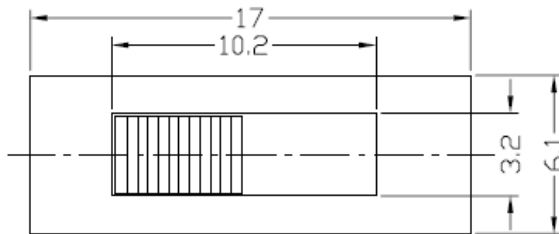

Circuit diagram

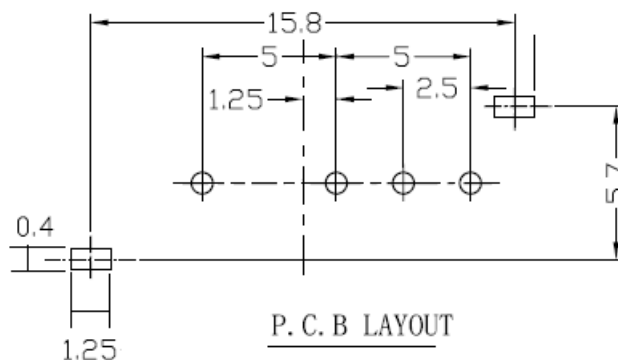

P. C. B LAYOUT

SPECIFICATIONS:

CONTACT: 1P3T - SILVER PLATED

RATING: 0.3A X 30 V DC

CONTACT RESISTANCE: 50 milli Ohms max.

INSULATION RESISTANCE: 100 M Ohms min. 500 V DC

PROOF VOLTAGE: 500 V AC for 1 min.

OPERATING LIFE: 10,000 cycles