
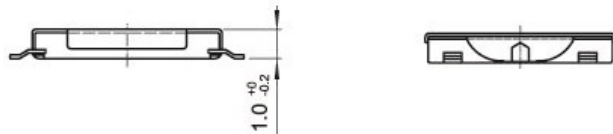



PART NUMBER: SMD-5252-03

DESCRIPTION: 5.2X5.2X1.0mm 5.2X5.2MM SMD TACT SWITCH

ROHS COMPLIANT

LOW PROFILE



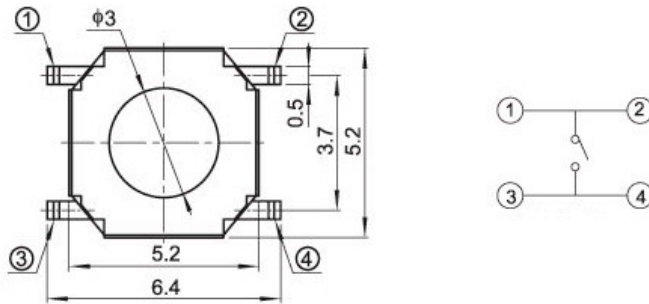


SPECIFICATIONS

PART NUMBER: SMD-5252-04

DESCRIPTION: 5.2X5.2X0.80mm 5.2X5.2 SMD TACT SWITCH

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

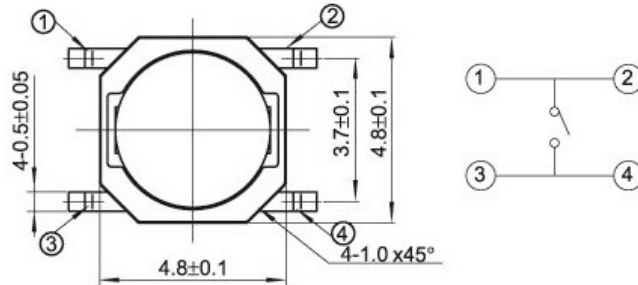

Dimensional tolerance +/- 0.2mm

PRAN ELECTRONICS PVT. LTD. INDIA.