



PRAN ELECTRONICS PVT. LTD.

52, GIDC, Makarpura, Vadodara - 390 010. India.

Phone : +91 - 265 - 2635918 / 263 5920 / 9727158028



E- mail : info@pranelectronics.com Web : www.pranelectronics.com

AN ISO 9001 : 2015 COMPANY


CIN NO. : U32100GJ1998PTC092136

PUSH SWITCH 2Pole Non Locking
Part code: PS-2270-5PIN-NL


RoHS Compliant
Rev. 01 date 02/01/2020*

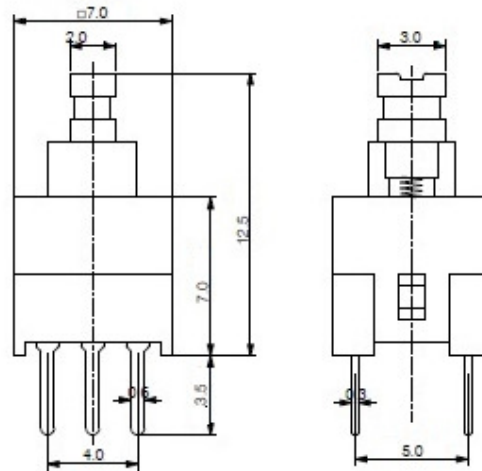

PCB LAYOUT



CIRCUIT DIAGRAM



SPECIFICATIONS:

1. Rating: 30V DC 100mA
2. Contact resistance initial: 100 milli ohms maximum
3. Contact resistance after life: 200 milli ohms maximum
4. Insulation resistance: 100 M ohms at 500VDC
5. Proof Voltage: 500 VAC for 1 minute
6. Travel: 2 ± 0.2 mm
7. Operating force: 200 ± 50 gf
8. Operating life: 10000 cycles mechanical, 6000 cycles electrical
9. Operating Temperature: -40 to 80 Deg. C
10. General tolerance: ± 0.3 mm

*Rev.00 – 5 PIN switch, Terminal No. 6 is CUT/MISSING

*Rev.01 – Operating temperature change